

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number
WO 2004/054851 A1

(51) International Patent Classification⁷: **B60R 21/02**

(21) International Application Number:
PCT/AU2002/001696

(22) International Filing Date:
17 December 2002 (17.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **REES
OPERATIONS PTY LTD** [AU/AU]; 20 Fitzroy Avenue,
Camden Park, S.A. 5038 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **GIUMELLI, Mark,
Anthony** [AU/AU]; 20 Fitzroy Avenue, Camden Park, S.A.
5038 (AU).

(74) Agent: **MADDERS**; 1/64 Hindmarsh Square, Adelaide,
South Australia 5000 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **IMPROVED MOTOR VEHICLE SAFETY BARRIER MOUNTING**

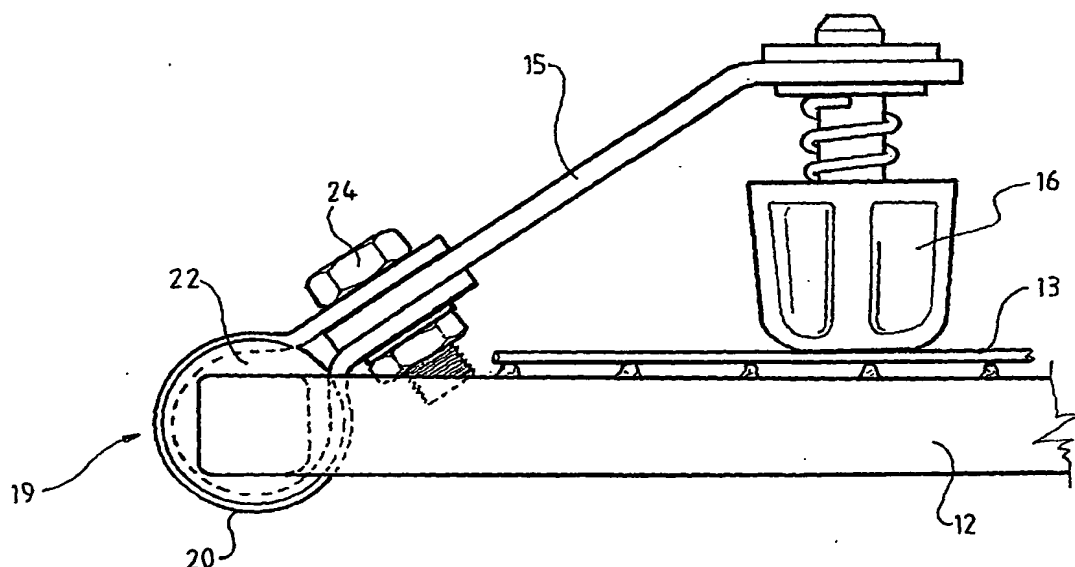

(57) **Abstract:** A improved form of attachment for a motor vehicle safety screen assembly which includes a screen having a perimeter frame (12) of tubular metal and an infill panel (13) extending between the perimeter frame members, and a plurality of metal securing straps (15) which are connected to the frame (12) of the screen by means of connector brackets (20) each mounted on a bush (22) which is fitted on a respective frame member of the frame (12), wherein each of the brackets (20) can be rotated about the axis of their associated bush (22) to positions on opposites sides of the screen. The bushes (22) are made of two hinged portions which can be opened to facilitate attachment to the frame member and then subsequently closed and clipped together.